


NOTES: UNLESS OTHERWISE NOTED

1. REMOVE ALL BURRS AND SHARP EDGES $.03$ R MAX
2. MACHINED SURFACE ROUGHNESS $125/$
3. MATCH WITH 2110-C7
4. S.F. WITH IT (11) 2110-D9

DRILL FOR $1/4$ SCREW
 3 HOLES EQUALLY SPACED
 ON 5.12 DIA B.C. REF

REVISIONS				
LTR	DESCRIPTION	ECR	DATE	BY/APVD

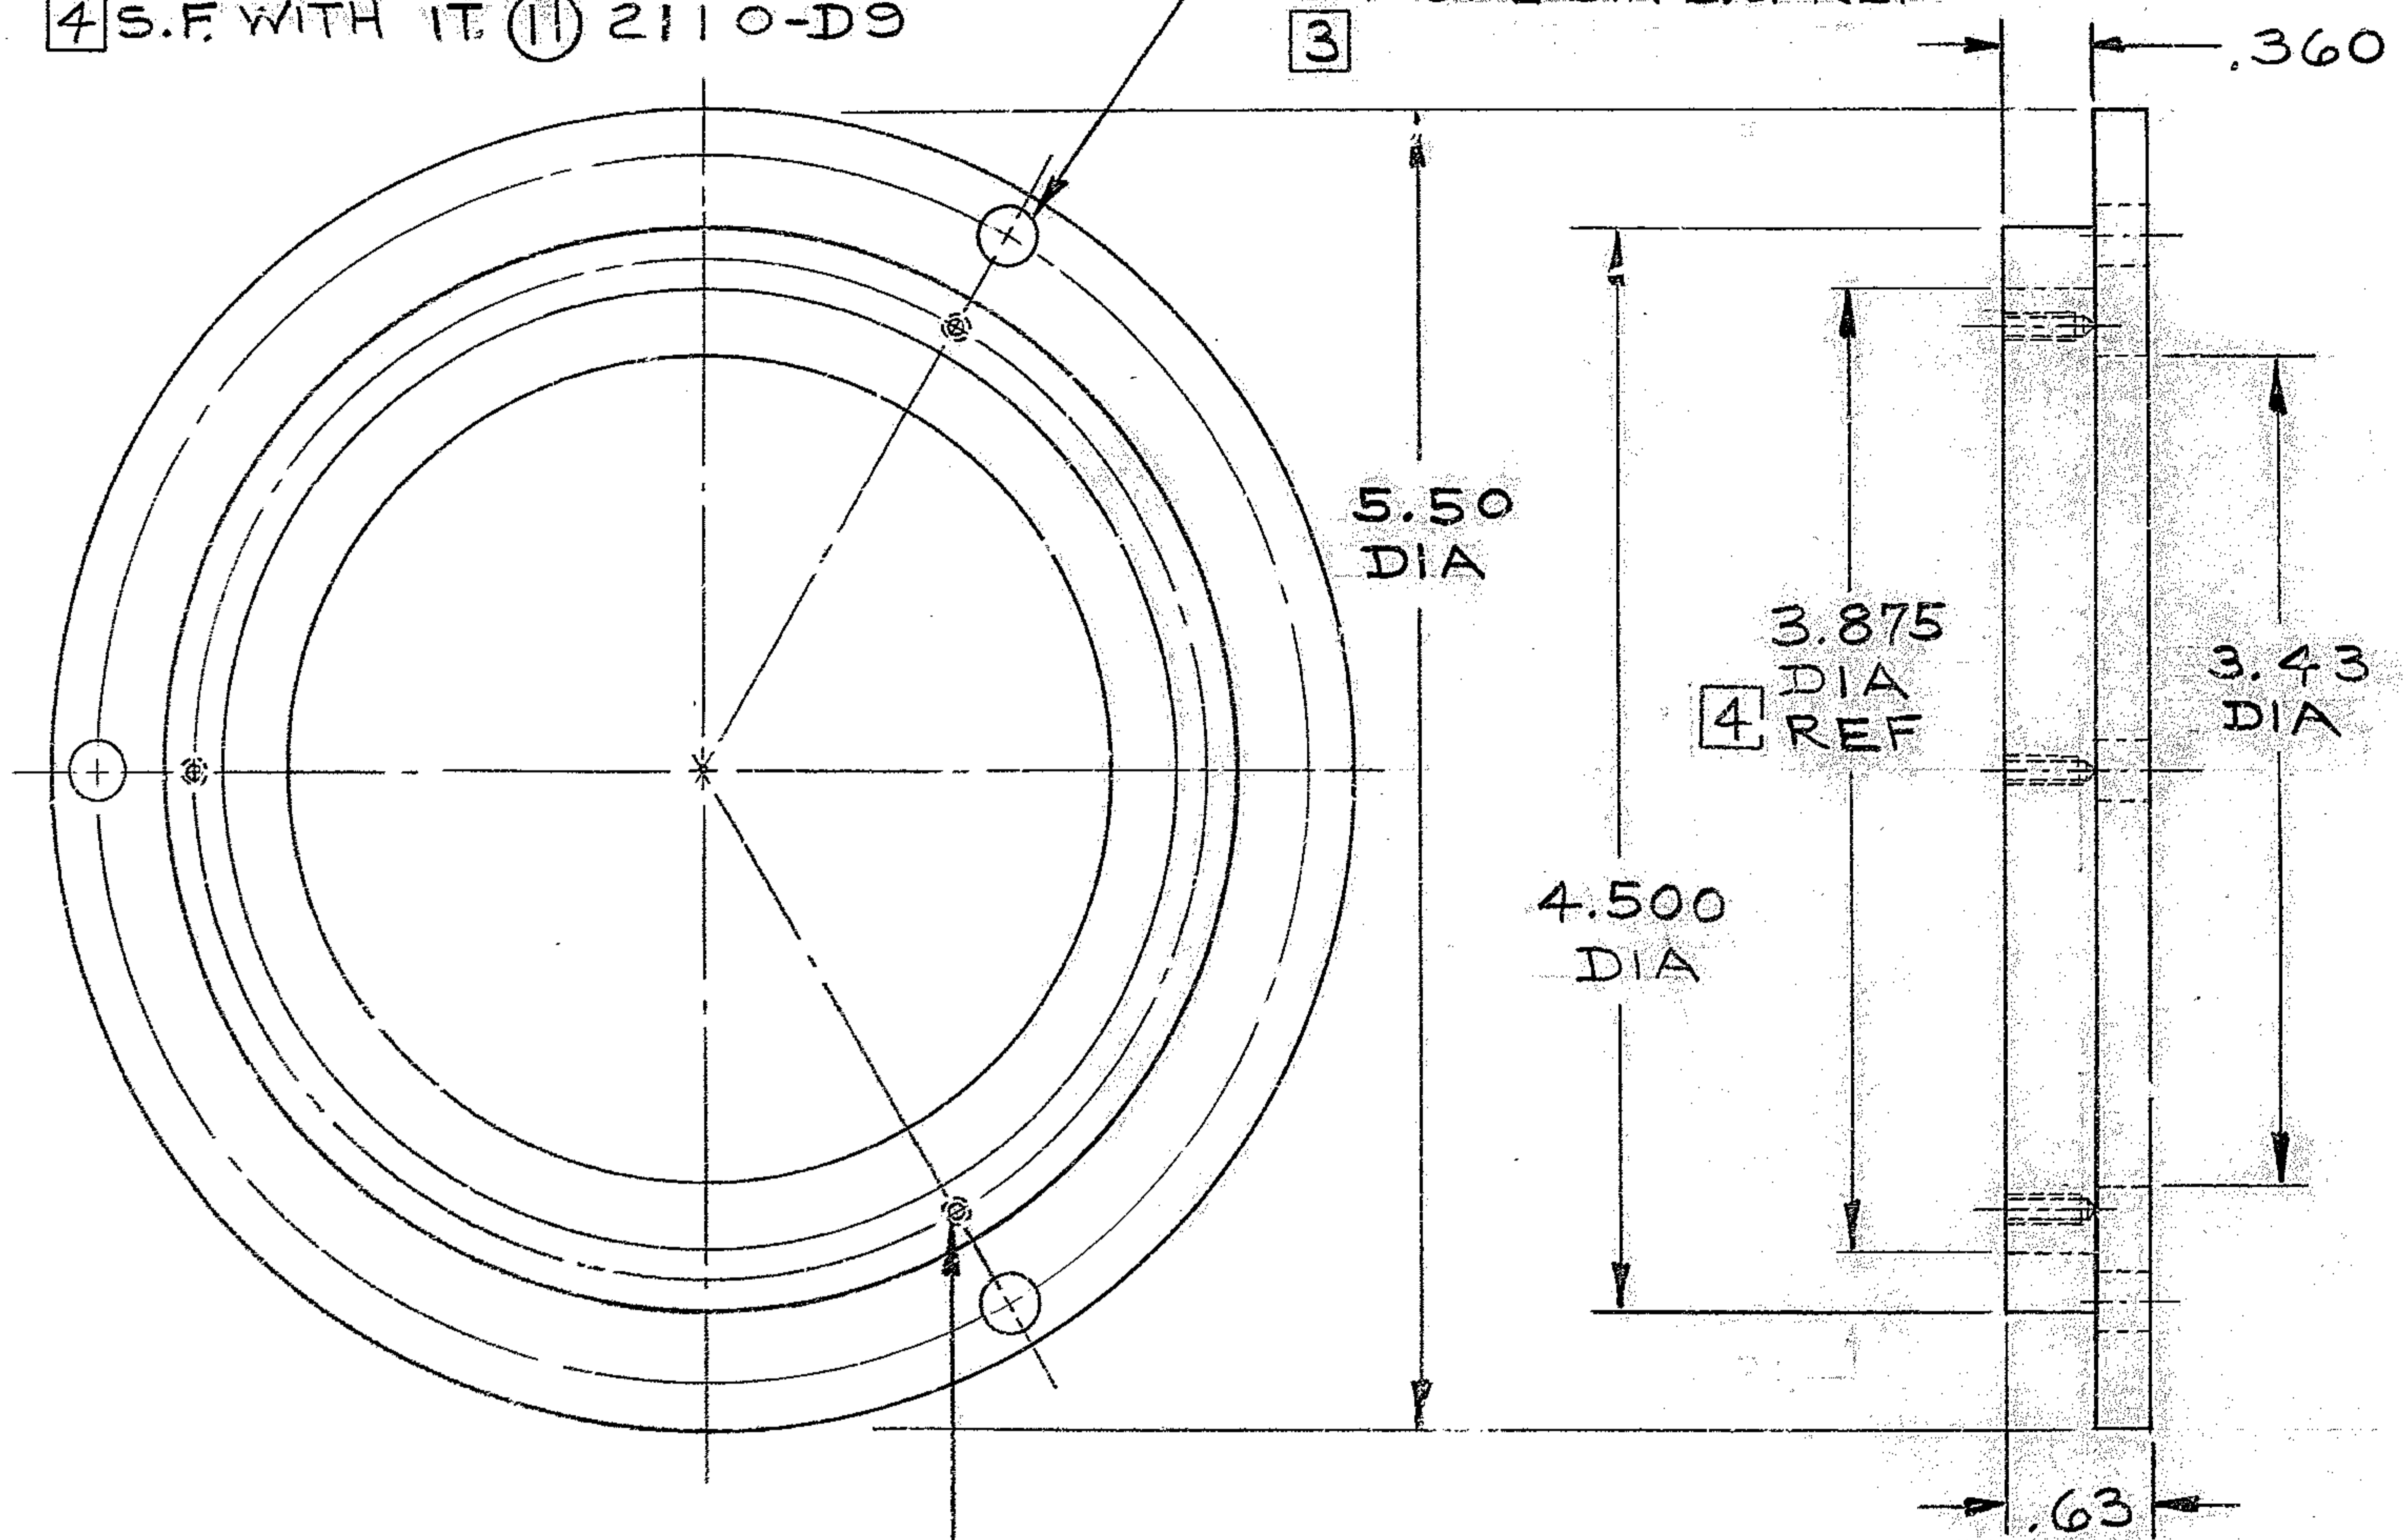

#4-40 THD x .31 DEEP-
 3 HOLES EQUALLY
 SPACED ON 4.19 DIA B.C.

MATL. ALUM
 FINISH: BLACK ANODIZE

150 INCH STELLAR TELESCOPE

TOLERANCES UNLESS OTHERWISE NOTED DECIMALS FRACTIONS ANGULAR $.XX \pm .03$ $\pm \text{---}$ $\pm 0^\circ 30'$ $.XXX \pm .010$			KITT PEAK NATIONAL OBSERVATORY OPERATED BY THE ASSOCIATION OF UNIVERSITIES FOR RESEARCH IN ASTRONOMY, INC. UNDER CONTRACT WITH NATIONAL SCIENCE FOUNDATION		
NEXT ASSEMBLY 2110-D9		NAME MIRROR MOUNTING RING SECONDARY FLIP ALIGNMENT MIRROR ASSY		REF FILE 1214	
SCALE: FULL PRINT ISSUED		DESIGNED BY A.A.A.	DATE 12-11-72	APPROVED BY A.A.A.	DATE 5-7-73
CHECKED BY D.L.B.		DATE 12-18-72	APPROVED BY (Signature)	DATE (Date)	DWG NO. 2110-B7
CHECKED BY (Signature)		DATE (Date)	APPROVED BY (Signature)	DATE (Date)	RELEASE DATE 5-3-73

RAC 5-2-73