NOTES: UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS AND SHARP EDGES .030
2. MACHINED SURFACE ROUGHNESS 125 ✓
3. ASSEMBLE WITH VIBRA-TITE THREAD LOCKING COMPOUND, SCREW HEADS TO BE .005-.010 BELOW SURFACE

REVISIONS						
ZONE	LTR	REVISIONS	ECR	DATE	BY	APRV

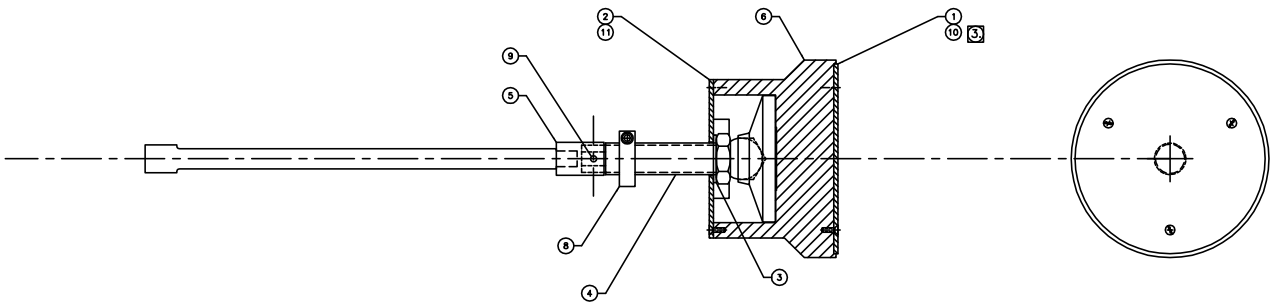

QTY REQD	PART OR IDENTIFYING NO	DESCRIPTION MATERIAL/SPECIFICATION	ZONE	ITEM NO
			12	12
9		#6-32 X 1/2 LG HEX SOC FLAT HD SCR STL	11	11
9		#6-32 X 1/2 LG SLOTTED FLAT HD SCR BRASS	10	10
3		COTTER PIN- 5/32 DIA X 1 1/2 LG	9	9
3	CTC-231	SHAFT COLLAR-THREADED REID	8	8
			7	7
3	2150.260C307	PAD-SUPPORT,MIRROR JACK	6	6
3	2150.260B315	EXTENSION	5	5
3	2150.260B314	STUD-JACK	4	4
3	2150.260A314	SPACER	3	3
3	2150.260A313	RETAINER-MIRROR JACK	2	2
3	2150.260A312	PAD-MIRROR JACK	1	1

TOLERANCES UNLESS OTHERWISE NOTED
DECIMALS .XX ± .03 .XXX ± .010 FRACTIONS ± - ANGULAR ± 0°30'

NATIONAL OPTICAL ASTRONOMY OBSERVATORIES
OPERATED BY THE
ASSOCIATION OF UNIVERSITIES FOR RESEARCH IN ASTRONOMY
UNDER COOPERATIVE AGREEMENT WITH
NATIONAL SCIENCE FOUNDATION

NEXT ASSEMBLY: 2150.260E002

NAME: MIRROR JACK ASSY

REF FILE: 1171

USED ON

SCALE: 1/2 &NOTED | DESIGNED BY | DATE | APPROVED BY | DATE | DWG NO: 2150.260D305 | REV

DRAWING PRODUCED USING AUTOCAD v.14 | DRAWN BY J.HOEY | DATE 4/4/00 | APPROVED BY | DATE

PRINT ISSUED | CHECKED BY | DATE | APPROVED BY | DATE | RELEASED | SHEET OF