
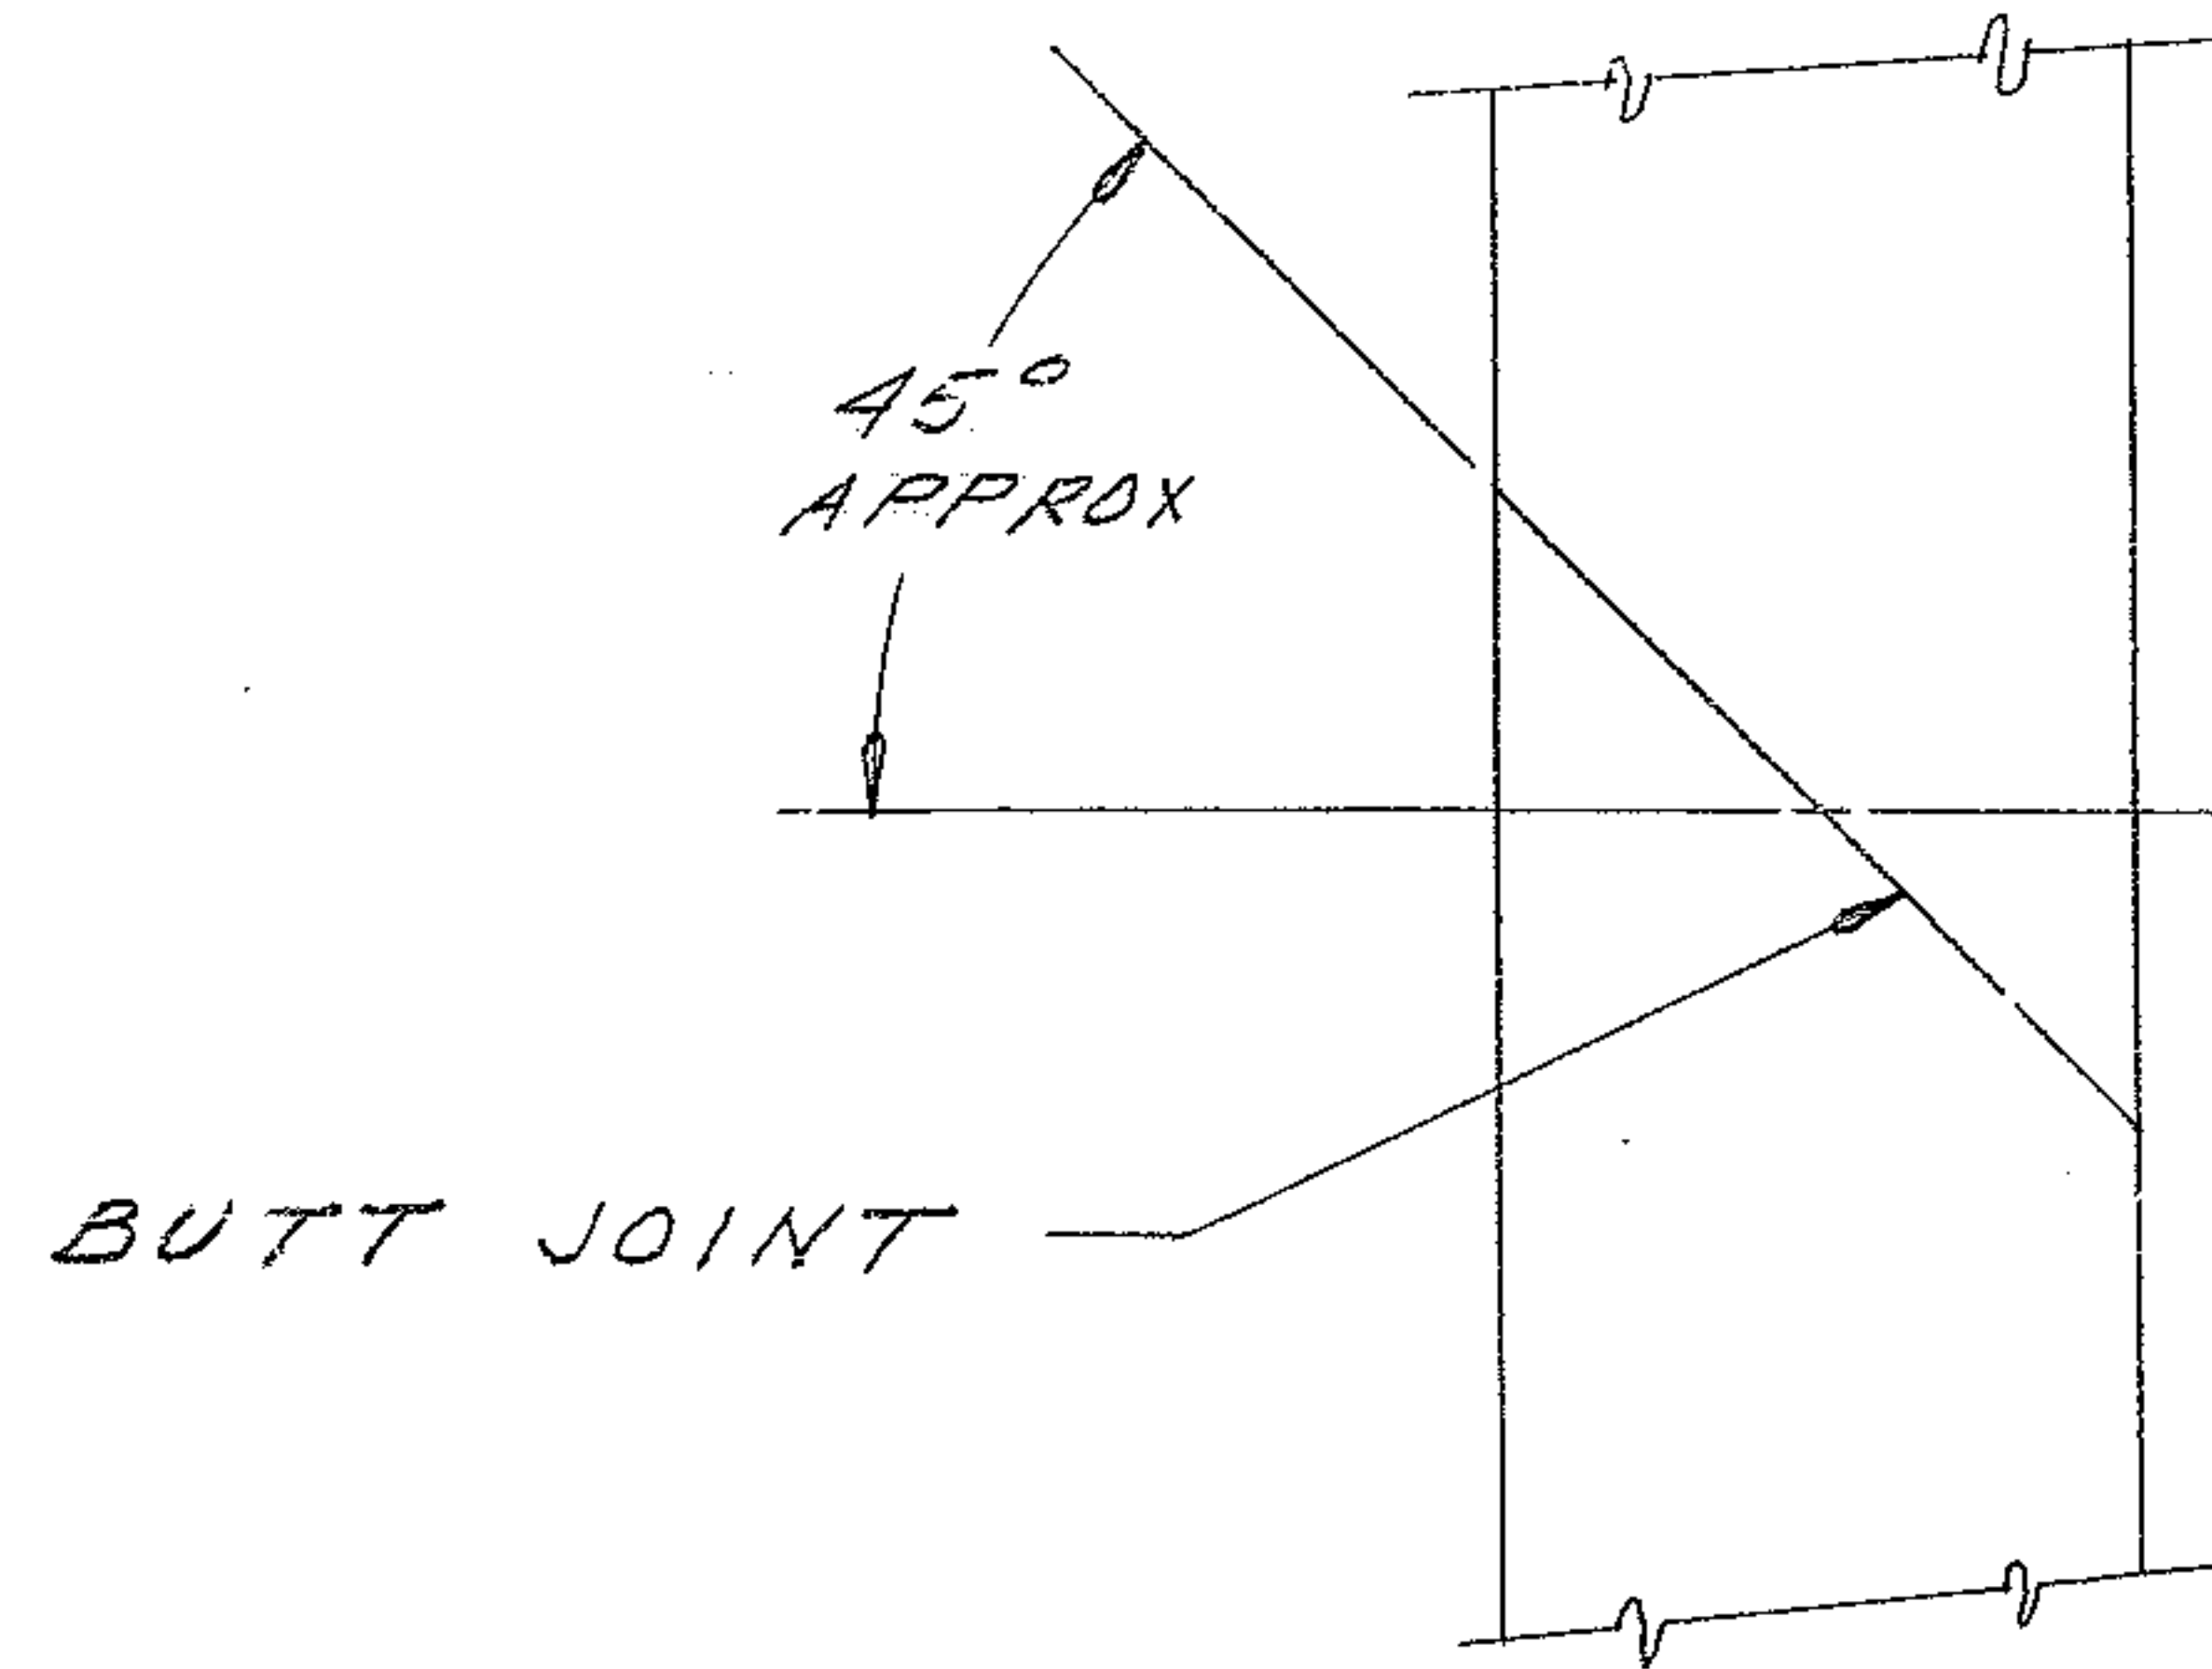


NOTES: UNLESS OTHERWISE NOTED

1. REMOVE ALL BURRS AND SHARP EDGES — R MAX
2. MACHINED SURFACE ROUGHNESS $\sqrt{125}$
3. MATL: $\frac{1}{16}$ THICK X $1\frac{1}{2}$ WIDE X 15 FT
- 40 DUROMETER NEOPRENE
4. BOND JOINT WITH EASTMAN 910 OR EQUIV
5. JOINT MUST BE FLAT & SMOOTH
6. STRETCH NEOPRENE AROUND MIRROR. OVERLAP APPROX 2", CUT AS SHOWN. REMOVE FROM MIRROR & BOND PER NOTES 4 & 5.

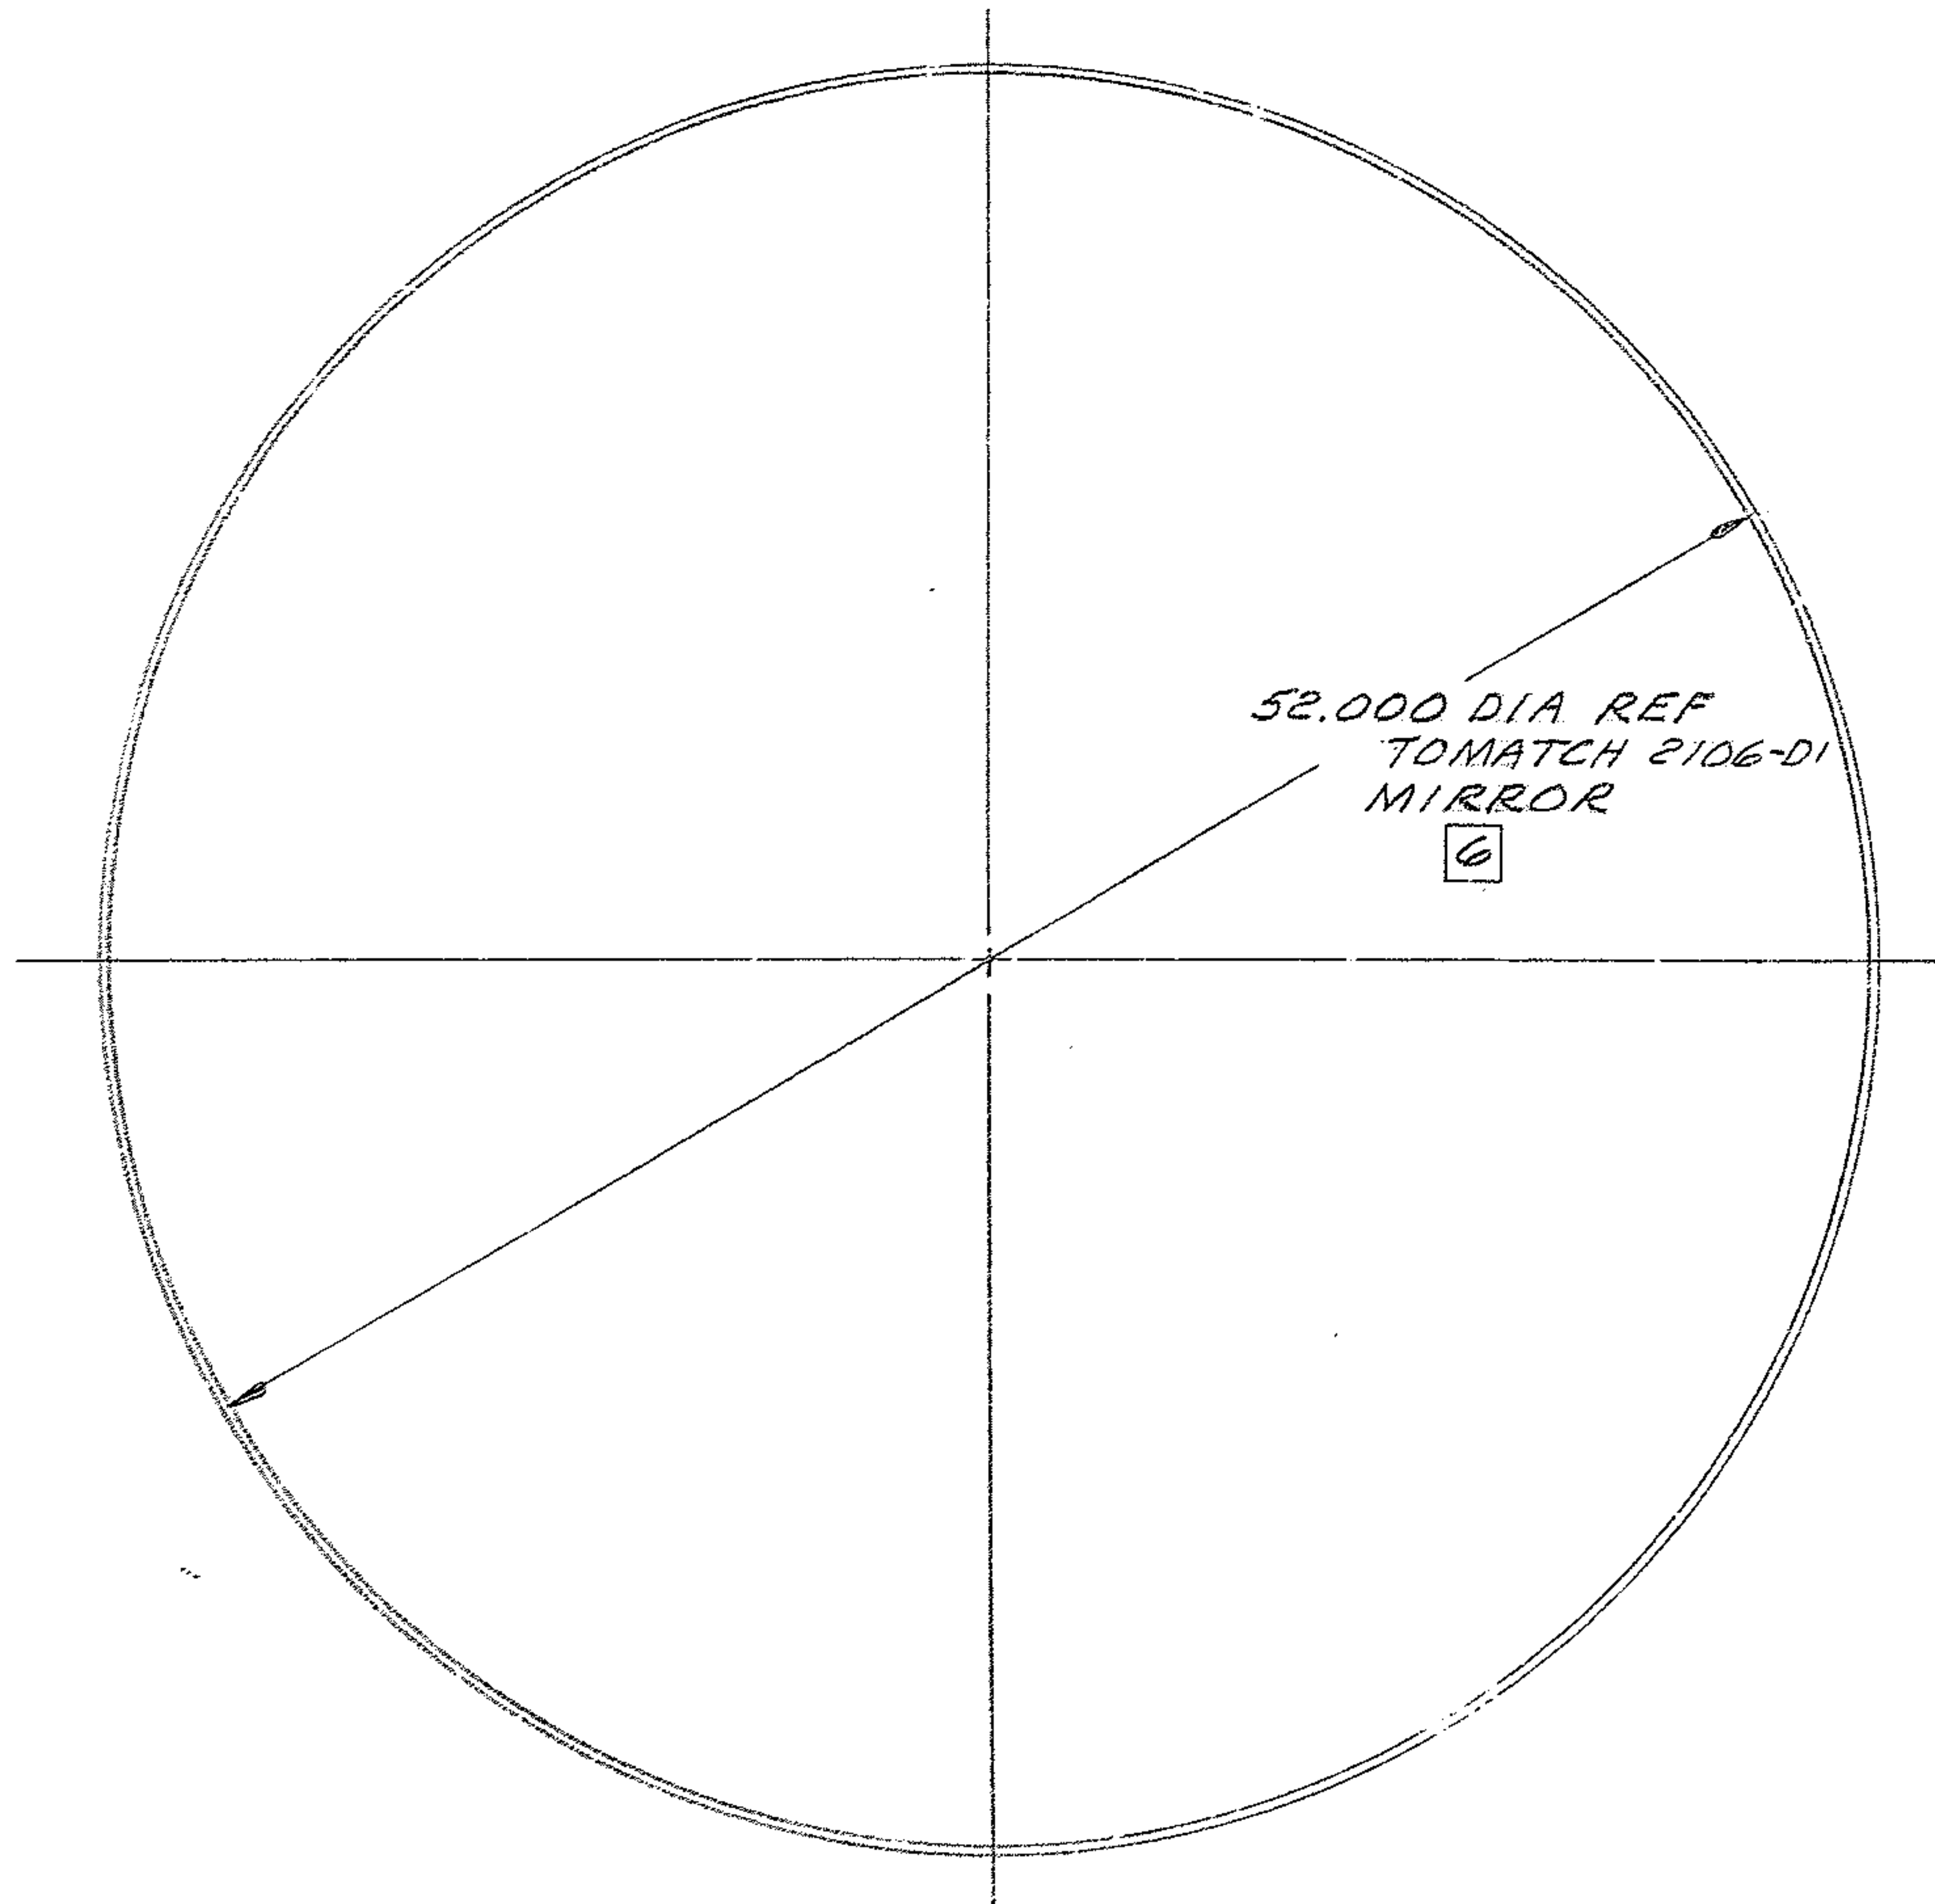

REVISIONS						
ZONE	LTR	DESCRIPTION	ECR	DATE	BY	APVD

QTY REQD	PART OR IDENTIFYING NO.	DESCRIPTION	MATERIAL / SPECIFICATION	ITEM NO.
PARTS LIST				
150" TELESCOPE				
TOLERANCES UNLESS OTHERWISE NOTED DECIMALS FRACTIONS ANGULAR .XX ± .03 ± — ± 0° 30'			KITT PEAK NATIONAL OBSERVATORY <small>OPERATED BY THE ASSOCIATION OF UNIVERSITIES FOR RESEARCH IN ASTRONOMY, INC. UNDER CONTRACT WITH NATIONAL SCIENCE FOUNDATION</small>	
NEXT ASSEMBLY 2150.580 -E002		NAME VACUUM SEAL		REF FILE 1128
SCALE NONE	DESIGNED BY BARR	DATE 5-13-74	APPROVED BY BARR	DATE 5-5-74
PRINT ISSUED	DRAWN BY HAGAR	DATE 7-29-74	APPROVED BY	DATE
	CHECKED BY RMC	DATE 9-4-74	APPROVED BY	DATE
			DWG NO. 2150.580-C024	REV
			RELEASE DATE 9-5-74	